



## Application area

- Milling wheat, rye, triticale, spelt, other types of grain, the intermediate products are produced during the milling process and additional products of the food industry (spices, tea and so on)
- Can also be used in the chemical industry and in other sectors of industry in which products must be milled gently and in stages


## Principle of operation

- The product stream which enters the feed shaft through the intake is feed into the milling gap through the feed rollers and feed guide device
- Depending on the area of application of the machine, the product in the milling gap between the two milling rollers is milled, shredded or crushed by shearing and / or compression
- The capacity and milling effect are essentially determined by the length of the milling rollers, their surface properties and peripheral speed as well as the size of the milling gap


## Main features

- Modern design
- Low construction height
- Simply handling and maintenance
- Automatic monitoring and regulation of product stream
- changing rollers as packet or each single roll separately
- Improved sanitation
- Product discharging either pneumatically or by gravity
- product contact parts made of stainless steel
- ATEX conformity available on request

Roller mill with gravity product discharge

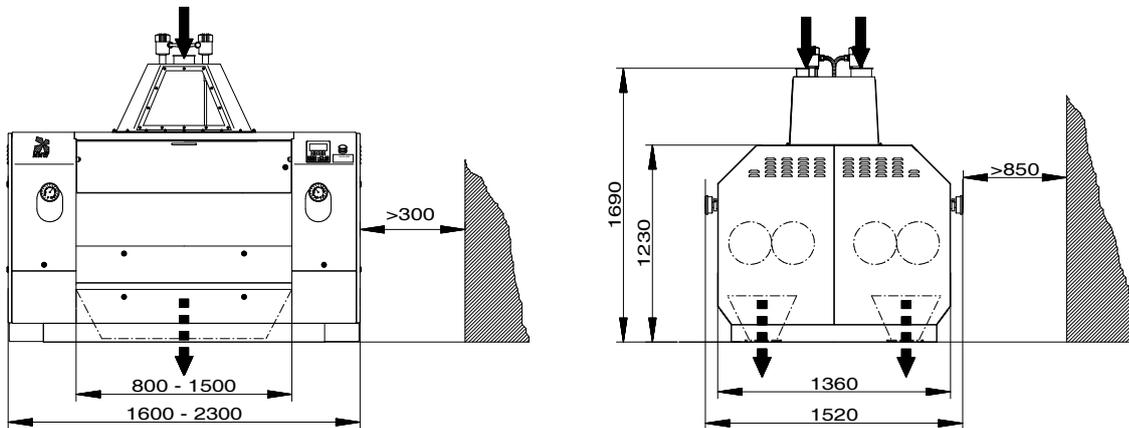

Roller mill with pneumatic product discharge

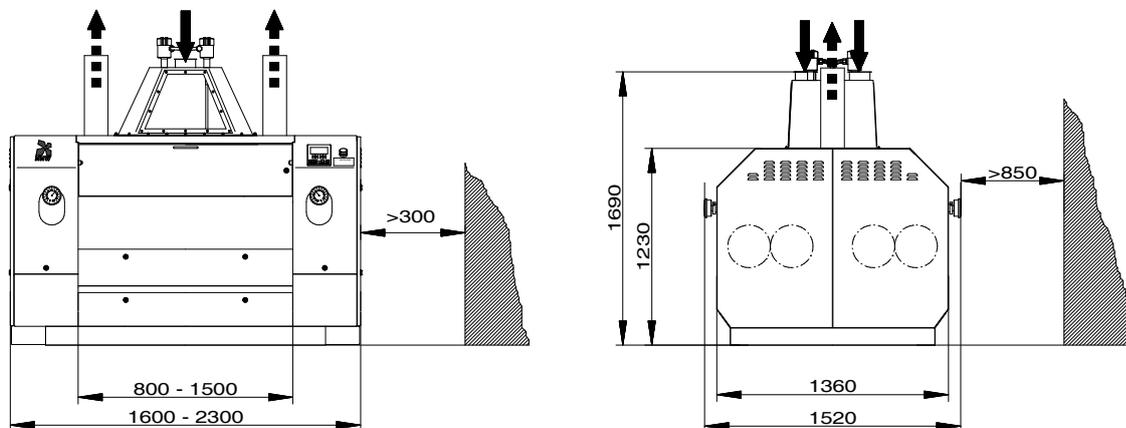

Type	Roll		Dimensions			Weight (kg)
	Ø (mm)	Length (mm)	Length (mm)	Width (mm)	Height (mm)	
WS 4B - 250/800	250	800	1600	1360 (1520) <sup>1</sup>	1230 (1690) <sup>2</sup>	2900
WS 4B - 250/1000		1000	1800			3100
WS 4B - 250/1250		1250	2050			3400
WS 4B - 250/1500		1500	2300			3700

<sup>1</sup> including milling gap adjustment

<sup>2</sup> connection height inlet

Technical changes reserved.  
MMW 2013/08